


Kanal-Schalldämpfer IAA



- Zur Reduzierung des Geräuschpegels im Kanal
- Kulissen aus hochwertiger Mineralwolle, strömungsseitig mit abriebfestem Vlies abgedeckt

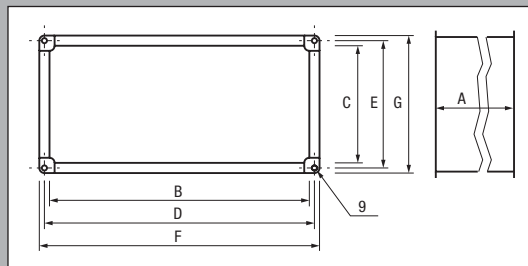

Abmessungen [mm]

Schalldämmmaß [dB]

Modell	A	B	C	D	E	F	G	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Gew.
IAA-200	1000	400	200	420	220	440	240	5	8	15	26	35	26	16	18,6 kg
IAA-225	1000	500	250	520	270	540	290	3	5	17	25	20	20	18	23,0 kg
IAA-250	1000	500	300	520	320	540	340	4	10	19	24	20	20	18	23,0 kg
IAA-285	1000	600	300	620	320	640	340	3	8	13	25	25	23	13	28,2 kg
IAA-315	1000	600	350	620	370	640	390	3	8	13	25	25	22	13	30,0 kg
IAA-355	1000	700	400	720	420	740	440	4	9	21	30	29	28	22	34,6 kg
IAA-400	1000	800	500	820	520	840	540	3	7	20	29	29	22	16	44,2 kg
IAA-450	1000	1000	500	1020	520	1040	540	3	7	17	30	37	28	19	56,0 kg

Kennlinien

